


基本性能/Genaral Specification:

项目(Item)	性能(Specifications)
步距角(Step Angle)	1.8°
温 升(Temperature Rise)	80°C max
环境温度 (Ambient Temperature)	-20°C~+50°C
绝缘电阻(Insulation Resistance)	100 MΩ Min. ,500VDC
电气强度(Dielectric Strength):	500VAC for 1minute
径向间隙(Shaft Radial Play)	0.02Max. (450g-load)
轴向间隙(Shaft Axial Play)	0.08Max. (450g-load)
最大径向压力(Max. radial force)	75N (20mm from the flange)
最大轴向压力(Max. axial force)	15N

型号 Model No.	步距角 Step Angle	长度 Motor Length	电流 Current /Phase	电阻 Resistance /Phase	电感 Inductance /Phase	静转矩 Holding Torque	引线数 # of Leads	定位转矩 Detent Torque	转子惯量 Rotor Inertia	重量 Mass
	(°)	(L)mm	A	Ω	mH	N.m	No.	g.cm	g.cm ²	Kg
OE60HS56-280 4BK2	1.8	56	2.8	1.04	2.94	1.79	4	700	300	0.77
OE60HS67-280 4BK2	1.8	67	2.8	1.2	4.6	2.1	4	900	570	1.2
OE60HS88-400 4BK2	1.8	88	4.0	0.65	2.4	3.0	4	1000	840	1.4
OE60HS100-50 04BK2	1.8	100	5.0	0.5	2.3	4.0	4	1100	980	1.7

Above only for representative products, products of special request can be made according to the customer request.

(Unit=mm)

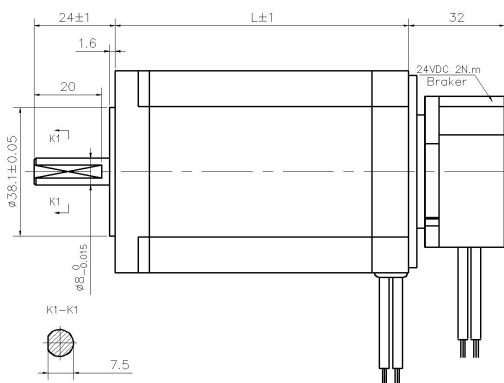

BLK 黑 A

GRN 绿 C

B 红 RED

D 蓝 BLUE

M